

Training Course

On

**Hydrological Processes in an Ungauged
Catchment**

[July 25 – 29, 2011]

CHAPTER-8

Regional Unit Hydrograph Analysis

By

R.D.Singh¹ and P.K. Bhunya²

¹Director, ²Scientist-E1

Organized under Hydrology Project - II

**National Institute of Hydrology
Roorkee – 247667 (Uttarakhand)**

REGIONAL UNIT HYDROGRAPH ANALYSIS**R.D.Singh¹ and P.K. Bhunya²**¹ Director, National Institute of Hydrology, Roorkee-247 667² Scientist-E1, National Institute of Hydrology, Roorkee-247 667**8.0 INTRODUCTION**

Whenever sufficient and reliable records on stream flow and rainfall are available the unit hydrograph for those basins can be derived from the rainfall-runoff data of storm events using one of the techniques. However, most of the small basins are generally not gauged and many water resources projects are being planned in those basins. Therefore, it becomes necessary to have the estimates of floods at the proposed sites in small ungauged basins. As we know, the unit hydrograph technique is one of the simple and most powerful techniques among other for the estimation of design flood. Therefore, the unit hydrographs for such basins have to be estimated by using data on climatological, physiographic and other factors of these basins.

The main purpose of the regional unit hydrograph study is to estimate the unit hydrograph ordinates or the unit hydrograph parameters for basins for which no gauge discharge data are available. The procedure involved in regional unit hydrograph analysis requires the evaluation of representative unit hydrograph parameters and pertinent physical characteristics for the gauged basins in the region. Then multiple linear regression analysis is performed, considering one of the unit hydrograph parameters at a time as a dependent variable and various basin characteristics as independent variables, in order to develop the regional relationship for the unit hydrograph derivation. Further, knowing the basin characteristic for an ungauged basin in the region from the available toposheet and climatological data, the unit hydrograph for that basin can be derived using the relationships developed for the region.

In this lecture, the various steps involved in developing the regional unit hydrograph relationships for a hydro meteorologically homogeneous region are described and discussed. Various regional unit hydrograph studies conducted in India as well as abroad are also presented to provide the proper understanding to the participants about the different forms of relationships established.

8.1 BASIC STEPS INVOLVED IN DEVELOPING THE REGIONAL UNIT HYDROGRAPH

The following steps should be followed in executing a regional study to develop regional unit hydrograph relationships for a basin.

- (i) **Choice of the basin:** In regional study, care should be taken to select those basins which are indeed similar in hydro-meteorological characteristics. The basins considered for developing

the regional unit hydrograph should be able to represent the regional behavior as close as possible. Further, one should always try to include maximum no. of gauged basins in the regional study. However, minimum eight to ten basins are required for the regional study.

(ii) **Split sample tests for the region:** In order to test the performance of the developed regional relationships, the data of at least two to three basins should be kept independent. It means, those basins should be treated as ungauged basins and they should not be considered while developing the regional relationship.

(iii) **Rainfall-runoff data:** Rainfall-runoff data of different basins for each of the major past flood events should be considered for analysis. If the basin underwent to some major changes due to man's influence or landuse changes, then the rainfall-runoff data of only recent past flood events should be considered for analysis.

(iv) **Computation of excess rainfall:** A suitable technique should be adopted to separate the loss from total rainfall in order to get the excess rainfall hyetograph.

(v) **Base flow separation:** The base flow should be separated from the streamflow hydrograph using a consistent base flow separation technique, in order to get the direct surface runoff hydrograph.

(vi) **Derivation of Unit Hydrograph:** The unit hydrograph should be derived by analyzing the excess rainfall-direct surface runoff data for each event of different basin using a suitable unit hydrograph derivation technique.

(vii) **Derivation of representative unit hydrograph:** The representative unit hydrograph for each basin may be derived by averaging the unit hydrograph obtained from different events of the basin using standard averaging procedure. However, if considerable variations are observed in unit hydrographs derived from different events of a basin, then the unit hydrograph parameters of each event should be considered, alongwith the basin and storm characteristics, in the regional study.

(viii) **Split sample test for the storms:** The performance of the representative unit hydrograph of a basin should be tested by reproducing the two or three independent storms which are not to be used for deriving the representative unit hydrograph.

(ix) **Development of regional unit hydrograph relationship:** Step-wise multiple linear regression analysis can be performed, taking the unit hydrograph parameters of different basin as dependent variables, and/or climatic characteristics as independent variables to develop the optimal regional unit hydrograph relationships.

(x) **Representative Unit Hydrograph for ungauged basins:** The regional relationships developed at step (ix) are used for split sample test for the region as described in step (ii). Further the representative unit hydrograph for the ungauged basins of the hydrometeorologically homogeneous region can be derived using measurable basin and/or climatic characteristics in the generalized relationships developed in step (ix).

The basic procedure can be summarized as follows:

- (i) From records of gauged basin in a given region, derive the relations between characteristics of the unit hydrograph and the physical characteristics of the basin. These relations depend on the method used, some of which are described as follows.
- (ii) Assume that these relationships apply to the ungauged basins in the region and use them to derive the synthetic unit hydrograph.

8.2 NASH'S APPROACH

Nash (1959) related the first and second moments of IUH with the basin characteristics of some English basins. He tried various forms of the relationships using different basin characteristics. However, the following relationships were finally obtained.

$$m_1 = 27.6 A^{0.3} S^{-0.3} \quad (1)$$

$$m_2 = 1.0 m_1^{-0.2} S^{-0.2} \quad (2)$$

where,

m_1 is the first moment of IUH about the origin

m_2 is the ratio of the second moment of IUH about the centroid to m_1^2

A is the basin area (mile²) and

S is a measure of overland slope.

For ungauged basin Eq. (1) and (2) were used to get m_1 and m_2 which are further used to get the parameters of Nash Model, n and K, using theorem of moments.

8.3 REGIONAL ANALYSIS

8.3.1 Regional Unit Hydrograph For Narmada Basin Based On Clark's Approach

A regional unit hydrograph study has been conducted for Narmada basin at National Institute of Hydrology, Roorkee. In this study the parameters, T_c and R, of Clark Model have been derived for the Narmada sub-basins using HEC-1 programme package. The value of $(T_c + R)$ and $R/(T_c+R)$ of each of the floods analyzed in each of the sub-basins have been averaged for the respective sub-basins. The regional relationship has been presented in the graphical form where average of $(T_c + R)$ for each sub basins have been plotted against their respective basin area as shown in Fig. 1. This plot along with the fixed value $R/(T_c+R)$ has been used to estimate the regional parameters for ungauged basins. The fixed value of $R/(T_c+R)$ has been taken up around 0.6 for sub-basins up stream of Bermanghat site, while for sub-basins on downstream of Bermanghat site, the average values of this ratio is around 0.45.

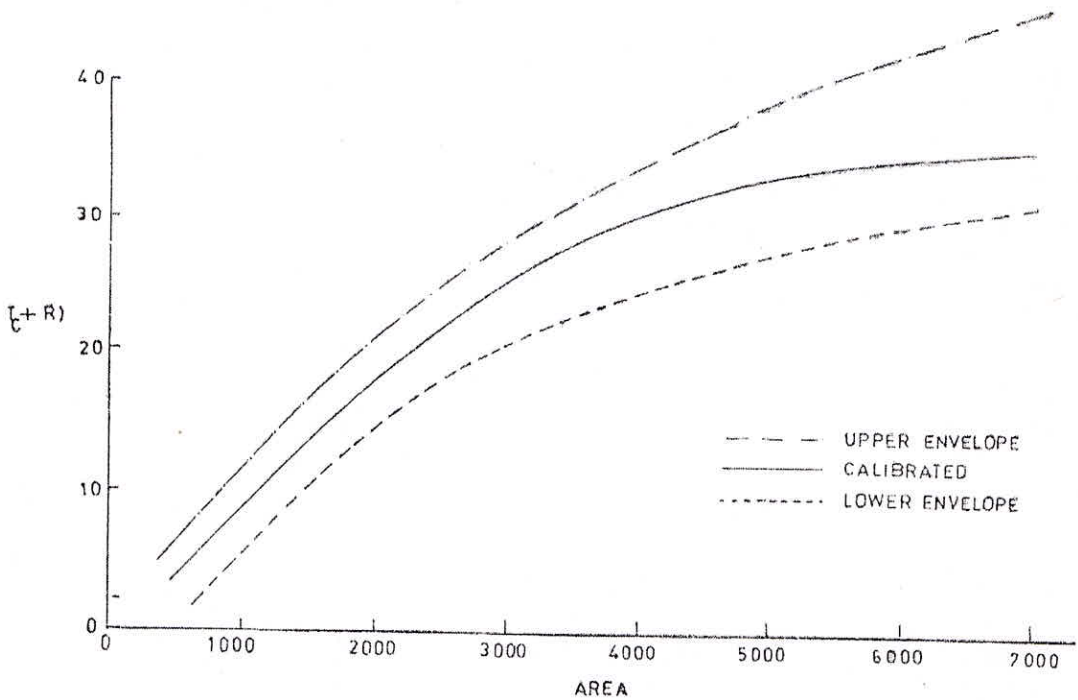


Fig. 8.1 Plot between Area versus $(T_c + R)$

8.3.2 Regional Unit Hydrograph For Lower Godavari Basin Subzone 3 (F) Based On Nash And Clark Approach

Singh (1984) developed the regional unit hydrograph relationships relating the physical parameters of five basins of Godavari basin subzone 3 (f) with the average parameters of Nash Model and Clark model for those basins. Figs. 2 and 3 illustrate the variation of nK with (LL_{cc}/\sqrt{S}) and K with main stream length L respectively. These two plots are used as the regional relationships based on Nash model.

The Clark model parameter T_c has been related with (LL_{cc}/\sqrt{S}) as shown in Fig. 4. A fixed value of the ratio $R/(T_c+R)$ along with T_c vs LL_{cc}/\sqrt{S} plot is used to establish the regional unit hydrograph relationships based on clark model. Due to non-availability of much data for the other bridge basins of the subzone 3 (f), only five basins have been considered in the regional study. Therefore the study has some what limited scope. However, it provides encouraging results for further investigation.

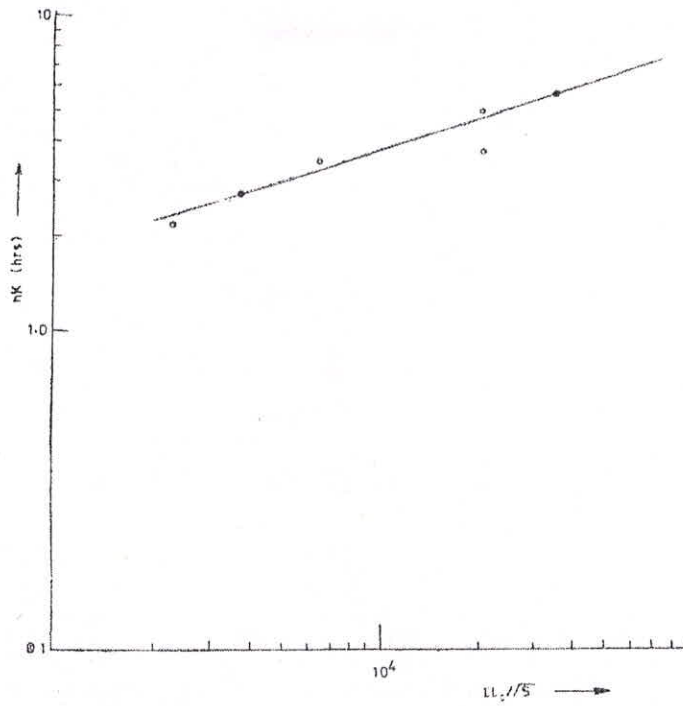


Fig. 8.2 Plot between nk and $LL_c/S^{0.5}$

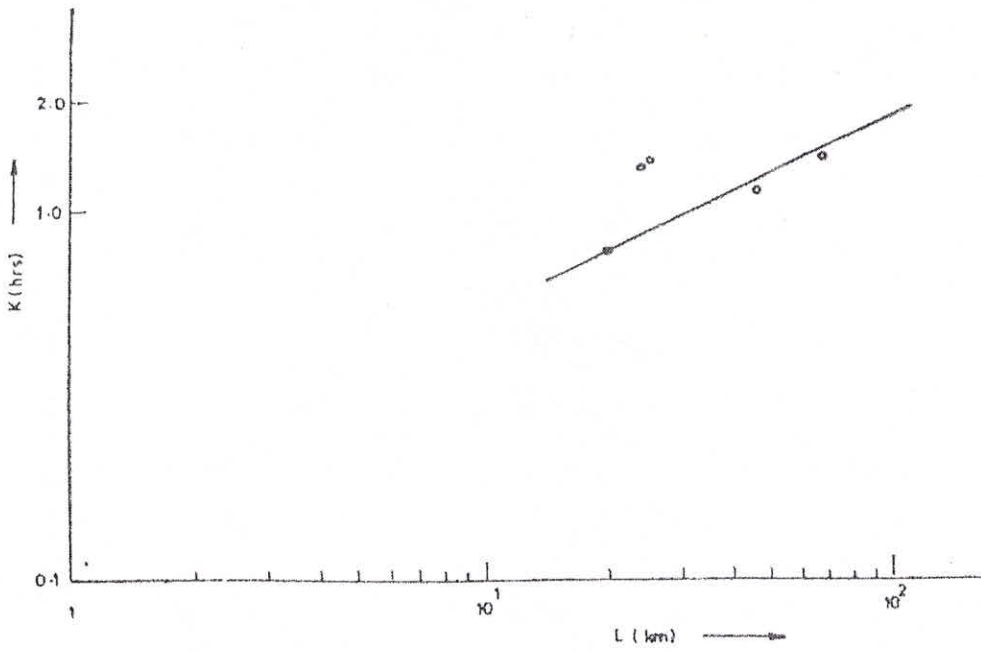


Fig. 8.3 Plot between K and L

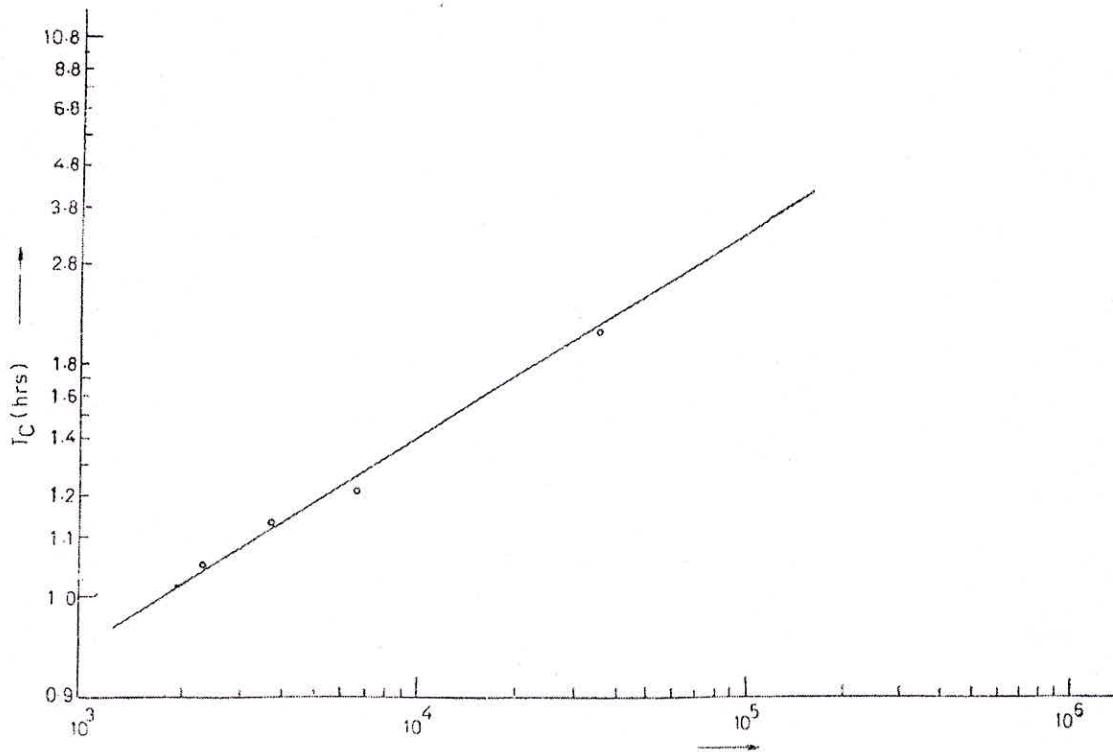


Fig 8.4 Plot between T_c and LL_c/\sqrt{S}

8.3.3 Summary

- (i) The regional unit hydrograph or synthetic unit hydrograph is a tool to overcome lack of stream flow data at the specific site under investigation.
- (ii) It is assumed that the unit hydrograph represents the physiographic characteristics of a basin.
- (iii) Multiple linear regression analysis is a most powerful tool for the regional unit hydrograph analysis.
- (iv) Data of unit hydrograph derived from stream flow and rainfall records in basins adjoining the basin under study should be used to estimate the constants for use to any regional unit hydrograph study.
- (v) Estimated constants in the regional relationships are transposed to the basin under study for the derivation of unit hydrograph parameters.
- (vi) Studies conducted for some typical region in India indicate encouraging results. It demands similar studies in systematic way for different hydrometeorologically homogeneous regions in India.

8.4 FLOOD ESTIMATION USING REGIONAL UNIT HYDROGRAPH APPROACH (A CASE STUDY)

Unit hydrograph approach is one of the most widely used techniques for the estimation of flood hydrograph. In this approach the excess design hyetograph of an event is converted into the direct surface runoff hydrograph using the principle of convolution, which is based on the principle of linearity. The flood hydrograph resulting due to the rainfall of desired duration and frequency is obtained using the principle of unit hydrograph. The regional equations for derivation of synthetic unit hydrograph for the Sub zone 3 (d) jointly developed by CWC, IMD and RDSO (1977) and described in Design flood estimation report of the Mahanadi Sub zone 3 (d) (CWC, 1997) are mentioned in Table 1.

Table 8.1 Regional relationship for SUH derivation

Sl. No.	Relationship
1.	$t_p = 1.757 (LLc/\sqrt{S})^{0.261}$
2.	$q_p = 1.260 (t_p)^{-0.725}$
3.	$W_{50} = 1.974 (q_p)^{-1.104}$
4.	$W_{75} = 0.961 (q_p)^{-1.125}$
5.	$W_{R50} = 1.150 (q_p)^{-0.829}$
6.	$W_{R75} = 0.527 (q_p)^{-0.932}$
7.	$T_B = 5.411 (t_p)^{0.826}$
8.	$T_m = t_p + t_r/2$
9.	$Q_p = q_p * A$

The procedure for computing design flood peak and design flood hydrograph for T-year return period by the synthetic unit hydrograph as described in Design flood estimation report of the Mahanadi Subzone 3 (d) (CWC, 1997) is briefly mentioned here under.

- (i) Derive the synthetic unit hydrograph for 1-cm and 1-hour.
- (ii) Estimate design storm duration as, $T_D = 1.1 * t_p$.
- (iii) Estimate the storm rainfall for the desired return period and design storm duration.
- (iv) Compute design storm rainfall hyetograph at hourly interval using the available distribution co-efficient (CWC, 1997)
- (v) Adopt design loss rate as recommended. In the present study a design loss of 0.21 mm/hour has been adopted (CWC, 1997).
- (vi) Obtain hourly excess rainfall hyetograph after subtracting the design loss rate from the design rainfall hyetograph.
- (vii) Arrange 1-hour rainfall values against the 1-hour unit hydrograph ordinates in such a manner that the maximum value of excess rainfall lies against the maximum ordinate of unit hydrograph, the next lower value of excess rainfall against the next lower unit hydrograph ordinate and so on.
- (viii) Reverse the sequence of hourly excess rainfall obtained in Step - (vii) to get the critical sequence of the rainfall units.

- (ix) Compute the direct surface runoff hydrograph by convoluting the hourly excess rainfall sequence, obtained in step (viii), with the unit hydrograph.
- (x) Estimate the base flow for the basin area under study. In this study, base flow of 0.01 cumecs per sq km area of the basin was used (CWC, 1997).
- (xi) Compute the flood hydrograph by adding the constant base flow to total direct surface runoff computed in Step - (ix).

Physiographic characteristics of the four basins and the parameters of the synthetic unit hydrographs for the four basins, derived based on CWC (1997) are in Table 8.2 (a) and (b), respectively.

Table 8.2(a) Physiographic characteristics of the four basins

S.	Basin	Basin	Basin	Basin	Basin
1	A (km ²)	6.07	11.24	4.13	21.45
2	L (km)	2.59	5.63	1.84	7.295
3	L _c (km)	1.76	2.32	0.83	3.53
4	S (m/km)	2.0980	0.4770	1.9187	0.2705

where, A is basin area in km², L is the length of the main channel in km, L_c is the length of the main channel from the perpendicular intercept of the center of the gravity of the basin in km², and S is the slope of the main channel in m/km, t_r is the duration of unit hydrograph in hours, t_p is time from the centre of the unit rainfall duration to the peak of unit hydrograph in hours, Q_p is the peak discharge of the unit hydrograph in cubic meters per second (cumecs), q_p is the peak discharge of the unit hydrograph per square kilometers of the basin in m³/s/km². W₅₀ is the width of the unit hydrograph measure at discharge ordinate equal to 50% of the Q_p. W₇₅ is the width of the unit hydrograph measured at discharge ordinate equal to 75% of the Q_p. W_{R50} is the width of the rising limb of the unit hydrograph measure at discharge ordinate equal to 50% of the Q_p. W_{R75} is the width of the rising limb of the unit hydrograph measured at discharge ordinate equal to 75% of the Q_p. T_D is the design storm duration computed as T_D = 1.1 * T_p and T_m is the time from the beginning of the rise of the peak of the unit hydrograph. It is summation of t_p and t_p*0.5t_r.

8.5 ESTIMATION OF FLOOD HYDROGRAPHS USING UNIT HYDROGRAPH APPROACH

The values of hourly rainfall and flood hydrographs computed for the four basins for the return periods of 25, 50 and 100 years are given in Tables 8.3 to Table 8.14. A comparison of design flood hydrographs for return periods of 25, 50 and 100 for the four basins is shown in Figs. 8.5 to 8.8. The flood hydrographs for probable maximum flood (PMF) for the four basins were also computed. Value of 1-day probable maximum precipitation (PMP) was adopted as 45 cm from the PMP atlas (IMD, 1988). The distribution coefficients for converting the 1-day PMP value into 24-hour rainfall were adopted from CWC (1997). Considering two bells of the PMP convoluted the PMP values. For this purpose, the maximum 12 values of the PMP were considered as first bell and the remaining 12 values were considered as the second bells. The values of first bell were so arranged that the maximum value is placed at the 9th hour and next to maximum value is placed at 10th hour and next to its at the 8th hour and so on till all the 12 values are arranged. For the second bell highest value is placed at the 15 hour and second highest at the

Table 8.2 (b) Unit hydrograph parameters for the four basins

S. No.	Unit Hydrograph characteristics	Basin A	Basin B	Basin C	Basin D
1	t_r (hours)	1	1	1	1
2	t_p (hours)	2.5	3.5	1.5	4.5
3	q_p ($m^3/s/km^2$)	0.65	0.50	0.90	0.42
4	W_{50} (hours)	3.2	4.2	2.1	5.10
5	W_{75} (hours)	1.5	2.1	1.0	2.53
6	W_{R50} (hours)	1.6	2.0	1.2	2.34
7	W_{R75} (hours)	0.9	1.0	0.6	1.17
8	T_B (hours)	11.5	15.2	7.6	18.74
9	T_D (hours)	2.5	3.5	1.5	4.5
10	T_m (hours)	3	4	2	5
11	Q_p (cumecs)	3.9	5.71	3.88	9.08

14th hour and the next highest at the 16th hour and so on till all the values are arranged. The estimated PMF hydrographs and the distributed PMP values are given in Tables 8.15 to 8.18, respectively.

Table 8.3: Flood hydrograph for 25 year return period 3-hour rainfall for basin A

Time (hours)	Rainfall (cm)	1-hr 1-cm Unit Hydrograph (cumecs)	25-Year Flood Hydrograph (cumecs)
0	0	0	0.61
1	10.91	1.5	1.21
2	1.91	2.9	17.82
3	0.82	3.9	35.75
4	0	2.7	48.35
5	0	1.8	36.85
6	0	1.4	25.02
7	0	1	19.05
8	0	0.8	14.01
9	0	0.6	11.11
10	0	0.3	8.51
11	0	0	4.84
12	0	0	1.12
13	0	0	0.61

Table 8.4: Flood hydrograph for 50 year return period 3-hour rainfall for basin A

Time	Rainfall	1-hr 1-cm	50-Year
(hours)	(cm)	Unit Hydrograph	Flood Hydrograph
		(cumecs)	(cumecs)
0	0	0	0.61
1	12.82	1.5	1.42
2	2.25	2.9	21.09
3	0.96	3.9	42.34
4	0	2.7	57.16
5	0	1.8	43.58
6	0	1.4	29.57
7	0	1	22.47
8	0	0.8	16.51
9	0	0.6	13.06
10	0	0.3	9.97
11	0	0	5.61
12	0	0	1.22
13	0	0	0.61

Table 8.5: Flood hydrograph for 100 year return 3-hour rainfall period for basin A

Time	Rainfall	1-hr 1-cm	100-Year
(hours)	(cm)	Unit Hydrograph	Flood Hydrograph
		Ordinates	
		(cumecs)	(cumecs)
0	0	0	0.61
1	14.73	1.5	1.63
2	2.58	2.9	24.36
3	1.1	3.9	48.92
4	0	2.7	65.94
5	0	1.8	50.28
6	0	1.4	34.09
7	0	1	25.88
8	0	0.8	18.99
9	0	0.6	15
10	0	0.3	11.42
11	0	0	6.38
12	0	0	1.32
13	0	0	0.61

Table 8.6: Flood hydrograph for 25 year return period 4-hour rainfall for basin B

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	25-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0.00	1.12
1	10.39	1.50	1.38
2	2.52	2.80	5.06
3	1.34	4.20	23.58
4	0.59	5.70	41.99
5	0.00	4.30	60.94
6	0.00	3.20	74.37
7	0.00	2.40	59.14
8	0.00	2.00	44.44
9	0.00	1.60	34.06
10	0.00	1.30	28.11
11	0.00	1.00	22.85
12	0.00	0.60	18.58
13	0.00	0.40	14.23
14	0.00	0.20	9.32
15	0.00	0.00	6.34
16	0.00	0.00	3.61
17	0.00	0.00	1.35
18	0.00	0.00	1.12

Table 8.7: Flood hydrograph for 50 year return period 4-hour rainfall for basin B

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	50-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	1.12
1	12.19	1.5	1.54
2	2.97	2.8	6.05
3	1.56	4.2	28
4	0.7	5.7	49.88
5	0	4.3	72.16
6	0	3.2	87.84
7	0	2.4	69.84
8	0	2	52.45
9	0	1.6	40.16
10	0	1.3	33.1

11	0	1	26.86
12	0	0.6	21.79
13	0	0.4	16.63
14	0	0.2	10.82
15	0	0	7.28
16	0	0	4.06
17	0	0	1.39
18	0	0	1.12

Table 8.8: Flood hydrograph for 100 year return period 4-hour rainfall for basin B

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	100-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	1.12
1	14	1.5	1.69
2	3.4	2.8	6.97
3	1.8	4.2	32.34
4	0.8	5.7	57.68
5	0	4.3	83.31
6	0	3.2	101.34
7	0	2.4	80.6
8	0	2	60.51
9	0	1.6	46.3
10	0	1.3	38.12
11	0	1	30.9
12	0	0.6	25.01
13	0	0.4	19.05
14	0	0.2	12.34
15	0	0	8.23
16	0	0	4.52
17	0	0	1.44
18	0	0	1.12

Table 8.9: Flood hydrograph for 25 year return period 2-hour rainfall for basin C

Time	Rainfall	1-hr 1-cm Unit Hydrograph	25-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	0.41
1	10.5	2.4	24.61
2	1.3	3.9	42.34
3	0	1.8	22.81
4	0	1.3	15.48
5	0	1	11.91
6	0	0.7	8.56
7	0	0.3	4.2
8	0	0	0.74

Table 8.10: Flood hydrograph for 50 year return period 2-hour rainfall for basin C

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	50-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	0.41
1	12.33	2.4	29
2	1.52	3.9	50.01
3	0	1.8	26.96
4	0	1.3	18.25
5	0	1	14.03
6	0	0.7	10.06
7	0	0.3	4.9
8	0	0	0.81

Table 8.11: Flood hydrograph for 100 year return period 2-hour rainfall for basin C

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	100-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	0.41
1	14.15	2.4	33.36
2	1.75	3.9	57.66
3	0	1.8	31.13
4	0	1.3	21.03
5	0	1	16.14
6	0	0.7	11.56
7	0	0.3	5.61
8	0	0	0.88

Table 8.12: Flood hydrograph for 25 year return period 5-hour rainfall for basin D

Time	Rainfall	1-hr 1-cm	25-Year
(hours)	(cm)	Unit Hydrograph	Flood Hydrograph
		(cumecs)	(cumecs)
0	0	0	2.14
1	10.35	1.6	2.98
2	2.66	3.2	7.73
3	1.26	5.3	28.96
4	0.94	7.5	53.16
5	0.47	9.1	82.77
6	0	7.6	110.84
7	0	5.5	125.15
8	0	4.2	106.37
9	0	3.6	80.42
10	0	3.0	62.86
11	0	2.5	53.14
12	0	2.0	44.6
13	0	1.5	37.26
14	0	1.0	30.03
15	0	0.8	22.97
16	0	0.5	16.6
17	0	0.4	13.13
18	0	0.2	9.4
19	0	0	7.42
20	0	0	4.72
21	0	0	2.46
22	0	0	2.2
23	0	0	2.14

Table 8.13: Flood hydrograph for 50 year return period 5-hour rainfall for basin D

Time	Rainfall	1-hr 1-cm	50-Year
(hours)	(cm)	Unit Hydrograph	Flood Hydrograph
		Ordinates	
		(cumecs)	(cumecs)
0	0	0	2.14
1	12.15	1.6	3.25
2	3.13	3.2	9.03
3	1.47	5.3	34.25
4	1.11	7.5	63.02
5	0.55	9.1	98.18
6	0	7.6	131.28

7	0	5.5	148.04
8	0	4.2	125.86
9	0	3.6	95.23
10	0	3.0	74.39
11	0	2.5	62.78
12	0	2.0	52.61
13	0	1.5	43.87
14	0	1.0	35.26
15	0	0.8	26.9
16	0	0.5	19.34
17	0	0.4	15.2
18	0	0.2	10.77
19	0	0	8.41
20	0	0	5.21
21	0	0	2.53
22	0	0	2.21
23	0	0	2.14

Table 8.14: Flood hydrograph for 100 year return period 5-hour rainfall for basin D

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	100-Year Flood Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	2.14
1	13.95	1.6	3.51
2	3.6	3.2	10.29
3	1.7	5.3	39.48
4	1.3	7.5	72.82
5	0.6	9.1	113.53
6	0	7.6	151.69
7	0	5.5	170.94
8	0	4.2	145.40
9	0	3.6	110.08
10	0	3.0	85.94
11	0	2.5	72.43
12	0	2.0	60.63
13	0	1.5	50.50
14	0	1.0	40.52
15	0	0.8	31.83
16	0	0.5	22.08
17*	0	0.4	17.28
18	0	0.2	12.14
19	0	0	9.39
20	0	0	5.69
21	0	0	2.61
22	0	0	2.23
23	0	0	2.14

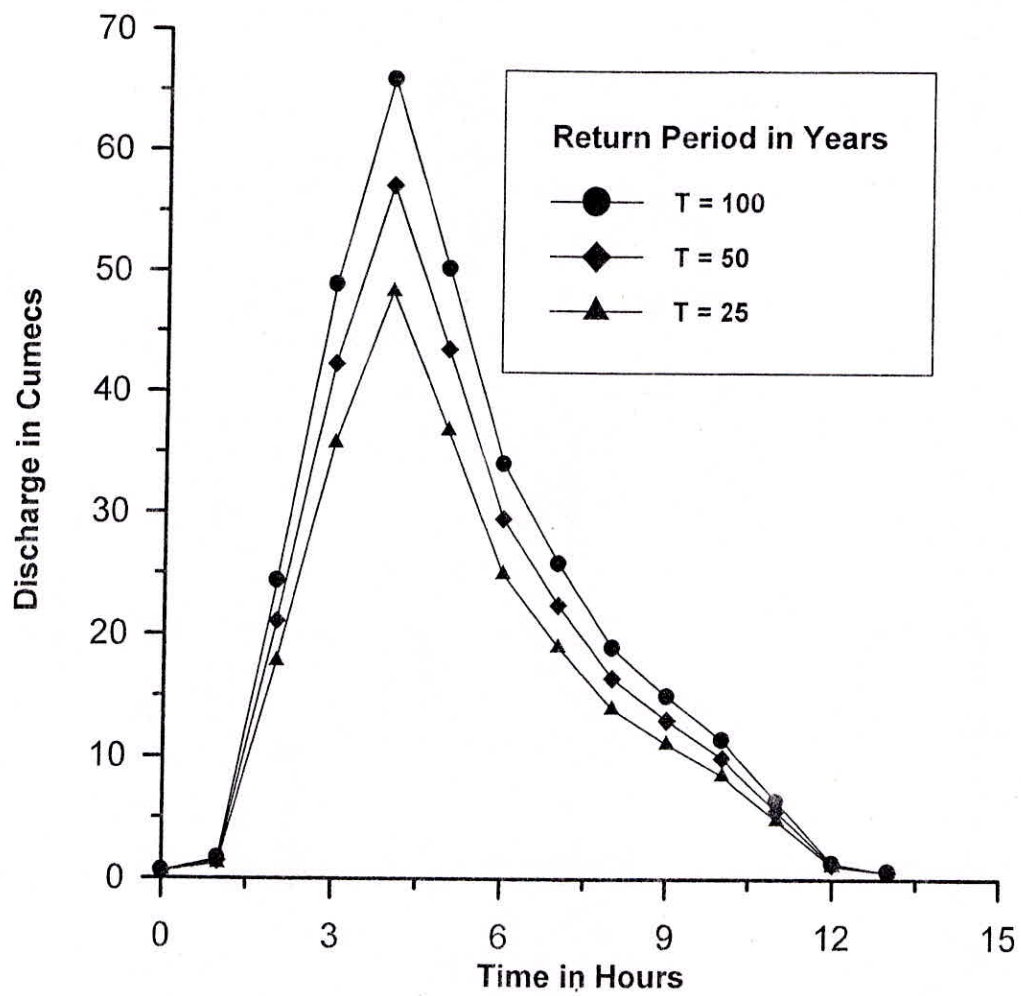


Fig. 8.5 Flood hydrographs for catchment A for 25, 50, and 100 year return periods

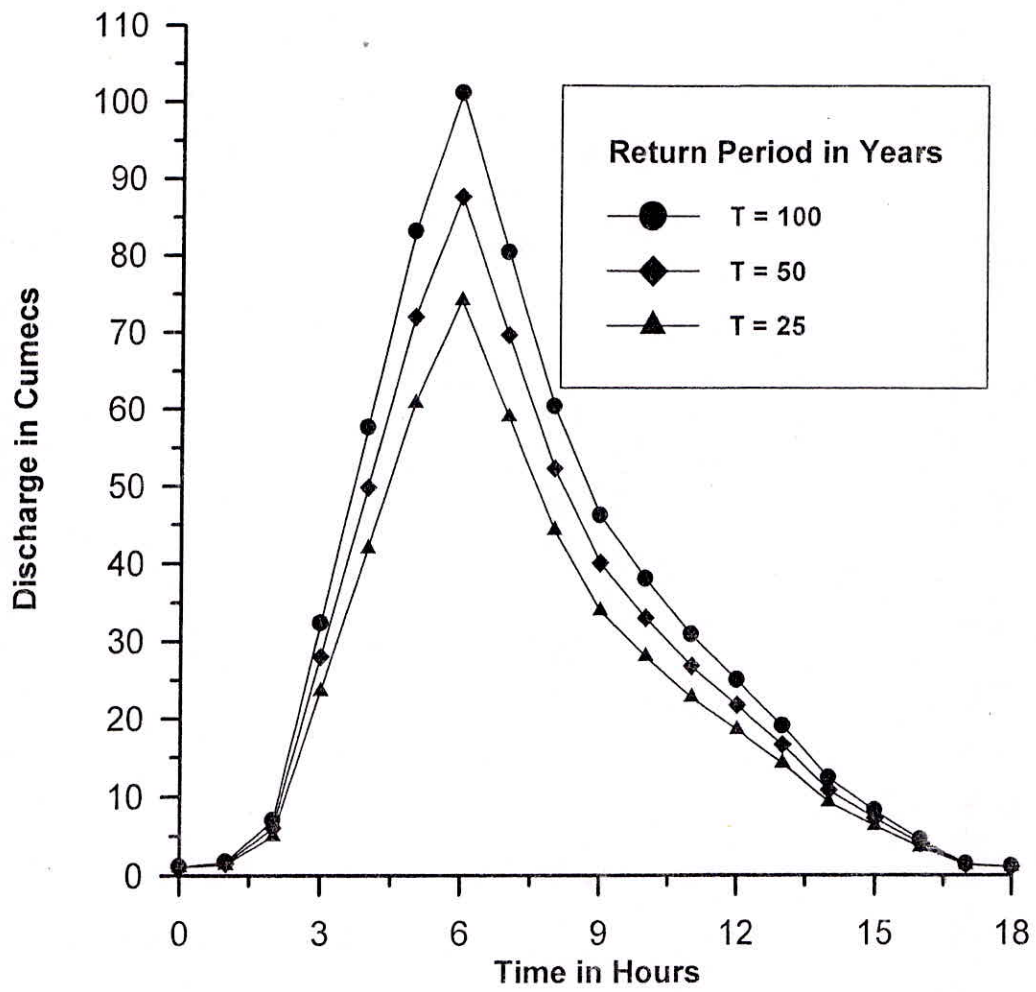


Fig. 8.6 Flood hydrographs for catchment B for 25, 50, and 100 year return periods

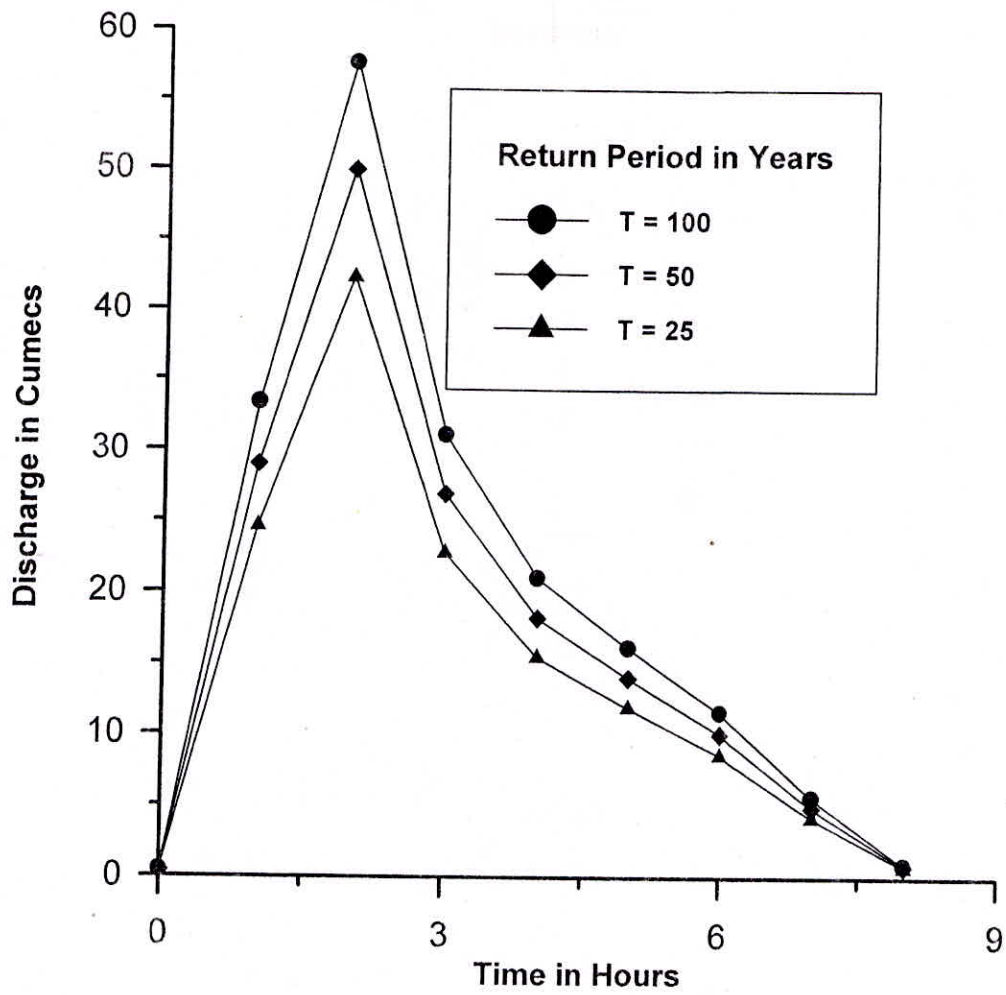


Fig. 8.7 Flood hydrographs for catchment C for 25, 50, and 100 year return periods

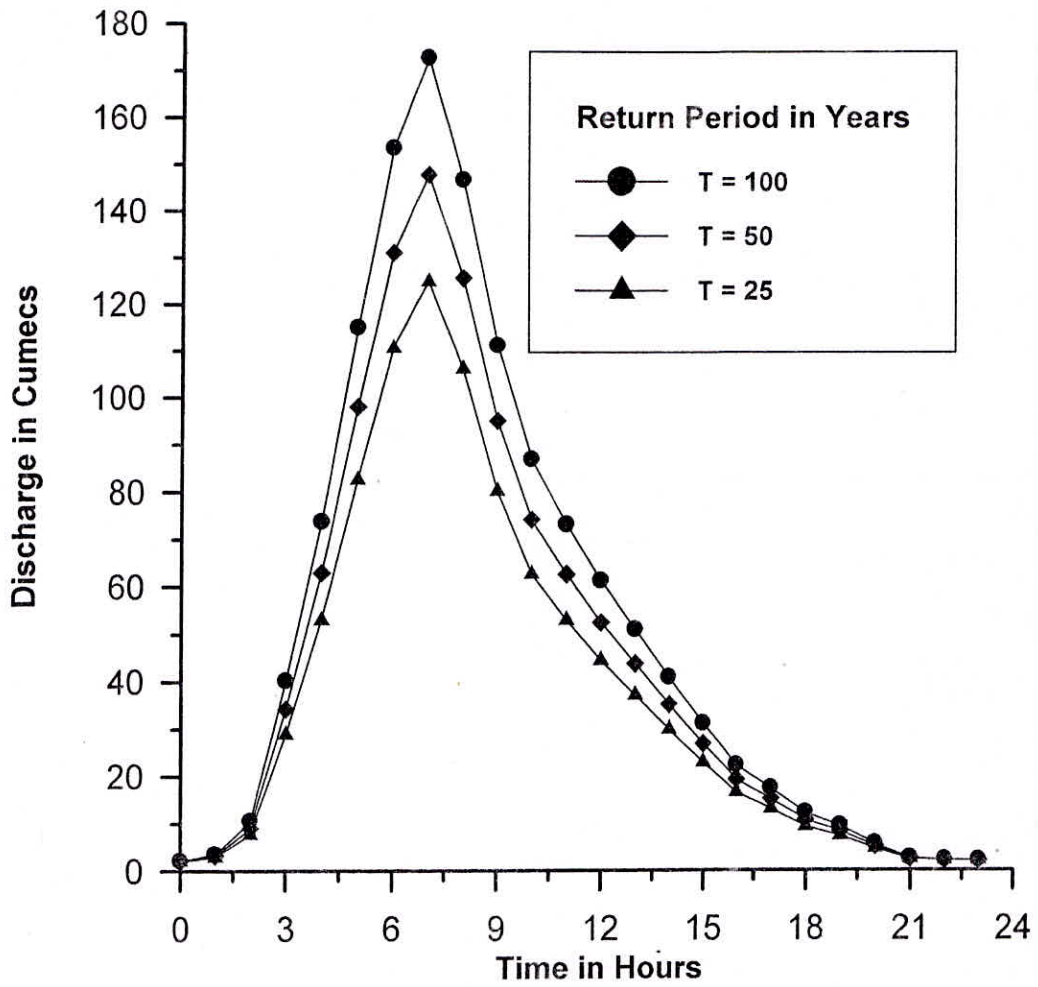


Fig. 8.8 Flood hydrographs for catchment D for 25, 50, and 100 year return periods

Table 8.15: PMF hydrograph for basin A

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	PMF Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	0.61
1	1.329	1.5	2.6
2	1.329	2.9	6.45
3	1.329	3.9	11.64
4	1.329	2.7	15.23
5	1.779	1.8	18.29
6	2.229	1.4	22.13
7	2.679	1	27.2
8	3.579	0.8	33.89
9	8.529	0.6	48.5
10	4.029	0.3	62.67
11	2.679	0	71.22
12	2.679	0	65.5
13	1.329	0	56.68
14	1.329		49.17
15	1.329		41.79
16	1.329		36.79
17	0.879		32.16
18	0.879		26.85
19	0.879		21.67
20	0.879		19.06
21	0.879		17.58
22	0.879		16.68
23	0.429		15.55
24	0.429		13.89
25			11.22
26			8.62
27			6.14
28			4.35
29			3.13
30			2.17
31			1.47
32			0.99
33			0.74
34			0.61

Table 8.16: PMF hydrograph for basin B

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	PMF Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0.00	1.13
1	1.329	1.50	3.12
2	1.329	2.80	6.84
3	1.329	4.20	12.43
4	1.329	5.70	20
5	1.779	4.30	26.39
6	2.229	3.20	32.58
7	2.679	2.40	39.59
8	3.579	2.00	49.32
9	8.529	1.60	67.78
10	4.029	1.30	86.33
11	2.679	1.00	103.41
12	2.679	0.60	116.36
13	1.329	0.40	109.83
14	1.329	0.20	98.84
15	1.329	0.00	87.73
16	1.329	0.00	78.19
17	0.879	0.00	69.95
18	0.879	0.00	62.71
19	0.879		55.51
20	0.879		47.59
21	0.879		41.74
22	0.879		37.06
23	0.429		32.69
24	0.429		29.54
25			25.84
26			21.31
27			17.12
28			12.97
29			9.86
30			7.5
31			5.75
32			4.31
33			3.17
34			2.34
35			1.73
36			1.39
37			1.21
38			1.13

Table 8.17: PMF hydrograph for basin C

Time	Rainfall	1-hr 1-cm Unit Hydrograph Ordinates	PMF Hydrograph
(hours)	(cm)	(cumecs)	(cumecs)
0	0	0	0.41
1	1.329	2.4	3.6
2	1.329	3.9	8.79
3	1.329	1.8	11.18
4	1.329	1.3	12.91
5	1.779	1	15.31
6	2.229	0.7	19.08
7	2.679	0.3	23.12
8	3.579	0	28.43
9	8.529		45.67
10	4.029		57.14
11	2.679		47.33
12	2.679		40.67
13	1.329		34.19
14	1.329		27.35
15	1.329		22.13
16	1.329		18.22
17	0.879		15.52
18	0.879		13
19	0.879		11.92
20	0.879		11.33
21	0.879		10.88
22	0.879		10.57
23	0.429		9.35
24	0.429		7.6
25			5.76
26			3.5
27			2.28
28			1.41
29			0.84
30			0.54

Table 8.18: PMF hydrograph for basin D

Time	Rainfall	1-hr 1-cm	PMF Hydrograph
(hours)	(cm)	Unit Hydrograph Ordinates	(cumecs)
		(cumecs)	
0	0	0	2.14
1	1.329	1.6	4.27
2	1.329	3.2	8.52
3	1.329	5.3	15.57
4	1.329	7.5	25.54
5	1.779	9.1	38.35
6	2.229	7.6	50.61
7	2.679	5.5	62.46
8	3.579	4.2	76.69
9	8.529	3.6	102.13
10	4.029	3	130.41
11	2.679	2.5	160.15
12	2.679	2	187.02
13	1.329	1.5	203.1
14	1.329	1	195.52
15	1.329	0.8	177.05
16	1.329	0.5	159.26
17	0.879	0.4	144.36
18	0.879	0.2	131.13
19	0.879	0	119.2
20	0.879	0	107.41
21	0.879	0	95.44
22	0.879	0	84.91
23	0.429	0	76.72
24	0.429		68.89
25			61.23
26			52.39
27			42.51
28			34.07
29			26.57
30			20.79
31			16.45
32			13.07
33			10.22
34			7.94
35			6.2
36			4.89
37			3.88
38			3.23
39			2.71
40			2.4
41			2.23
42			2.14

BIBLIOGRPHY

1. Central Water Commission. 1997. Flood estimation report for Mahanadi Subzone 3 (d). Report No. M-3(d)/R-3/25/97, Dte. of Hydrology (Regional Studies), Hydrology Study Organisation, New Delhi.
2. India Meteorological Department (IMD), 1988, Meteorological Monograph, Hydrology.
3. Nash, J.E. (1959), 'Note on a unit hydrograph study with particular reference to British Basins', Manuscript.
4. National Institute of Hydrology, Roorkee (1985), 'Design Flood Estimation for Narmada Sagar and Sardar Sarovar Project', Final Report Vol.1, July. No.11/1988, Generalised maps of 1-day point PMP, IMD, New Delhi.