

RAINFALL-RUNOFF MODELLING AN OVERVIEW

A.K.Lohani
Scientist F

INTRODUCTION

The problem of transformation of rainfall into runoff has been subject of scientific investigations throughout the evolution of the subject of hydrology. Hydrologists are mainly concerned with evaluation of catchment response for planning, development and operation of various water resources schemes. A number of investigators have tried to relate runoff with the different characteristics which affect it. For the purpose of rainfall-runoff process simulation and design flood evaluation, conceptual and physical based models are widely used. The model calibration and validation are the important aspects of the hydrological modelling proper calibration and validation of the hydrological model is necessary before using the model for simulation. In order to ascertain the uncertainty in the parameters as well as parameter stability the sensitivity analysis must be carried out.

GENERAL DATA REQUIREMENT

Before undertaking rainfall-runoff modelling for a particular storm, it is advisable to assess the quantity and quality of available data. Quite often, the available data dictate the type of model to be used more than the problem itself. A general inventory of data frequently available or needed is given in what follows.

Watershed Characteristics

The most commonly available is the topographic map from which many useful geomorphic parameters can be extracted, that is, watershed area, subbasin areas, elevations, slopes, channel lengths, channel profiles, centroid, etc. Many other geomorphic parameters can then be computed. Another useful map is the landuse map, which provides data on areas of land-use practice, soil types, vegetation, forest areas, "lakes, urban development, etc.

Rainfall Characteristics

Determination of the average amount of rain that falls on a basin/subbasins during a given storm is a fundamental requirement for many rainfall-runoff models. A number of techniques for estimating mean areal rainfall have been developed. Rainfall hyetographs are needed for each subbasin. Some of the subbasins may not have a recording raingauge and may involve extrapolation of rainfall data from neighbouring subbasins. If a subbasin has more than one raingauge, then the mean areal rainfall hyetograph is to be determined. Sometimes, only standard/storage-type raingauges are available in some watersheds. The rainfall amounts then need to be properly distributed in time so that rainfall hyetographs can be prescribed.

Infiltration and other Loss Characteristics

In a majority of cases, no data are available on soil infiltration, interception, depression storage, and antecedent soil moisture. If data do exist in part or full, maximum advantage must be taken to estimate infiltration and other loss functions. If no information is available on antecedent soil moisture, then an antecedent precipitation index can be used to get an estimate of the antecedent soil moisture. Soil type and landuse vegetation complex can be used to estimate infiltration parameters.

Streamflow Characteristics

Streamflow may be available in terms of the stage at the watershed outlet and at some other gauges within the watershed. Appropriate rating curves can be used to convert stages into discharges. Part of the streamflow data may be used for model calibration and the remaining data for model verification.

CLASSIFICATION OF DETERMINISTIC MODELS

A model represents the physical/chemical/biological characteristics of the catchment and simulates the natural hydrological processes. It is not an end in itself but is a tool in a larger process which is usually a decision problem. It aids in making decisions, particularly where data or information are scarce or there are large numbers of options to choose from. It is not a replacement for field observations. Its value lies in its ability, when correctly chosen and adjusted, to extract the maximum amount of information from the available data.

Hydrological models can be classified in different ways. Fleming (1975) and Woolhiser (1973) classified the hydrological model. Not all models fit easily into this classification but it is general with respect to fundamental principles. A related but less general classification is presented by Clarke (1973b) who suggests that many of the models presented in the literature can be divided into the deterministic and the stochastic. These two groups can each be further divided into the conceptual and the empirical and additional subdivisions occur between spatially lumped/spatially distributed and linear/nonlinear models.

Two main groups of mathematical methods emerge: those which involve optimization and those which do not (Fig. 1). Here optimization is referred to strictly in the sense of decision making rather than in the optimization of model parameters. The nonoptimizing methods are generally associated with the assessment of hydrological data and are used to quantify the physical processes. Methods involving optimization are concerned with the problem of selecting the "best" solution among a number of alternatives in a planning process.

Nonoptimizing methods are divided into two fundamentally different approaches, the deterministic and the statistical. However, although the deterministic and the statistical methods are fundamentally different, a strong interplay between the two approaches exists, mainly because the processes involved in the hydrological cycle are partly casual and partly random. Hence, some deterministic models contain random functions to relate processes, while some statistical models contain casual or deterministic functions as part of their structure. The

interplay between the two approaches also includes the subsequent analysis of the information gained from the different models. For example, a deterministic model using a conceptual representation of the hydrological cycle may be used in producing a record of streamflow at a gauging station. This record may then be analysed by statistical methods to produce a flood frequency curve for that site. Conversely, a statistical method involving the generation of rainfall data by a stochastic model could provide input to a conceptual model producing information which is then again analyzed statistically.

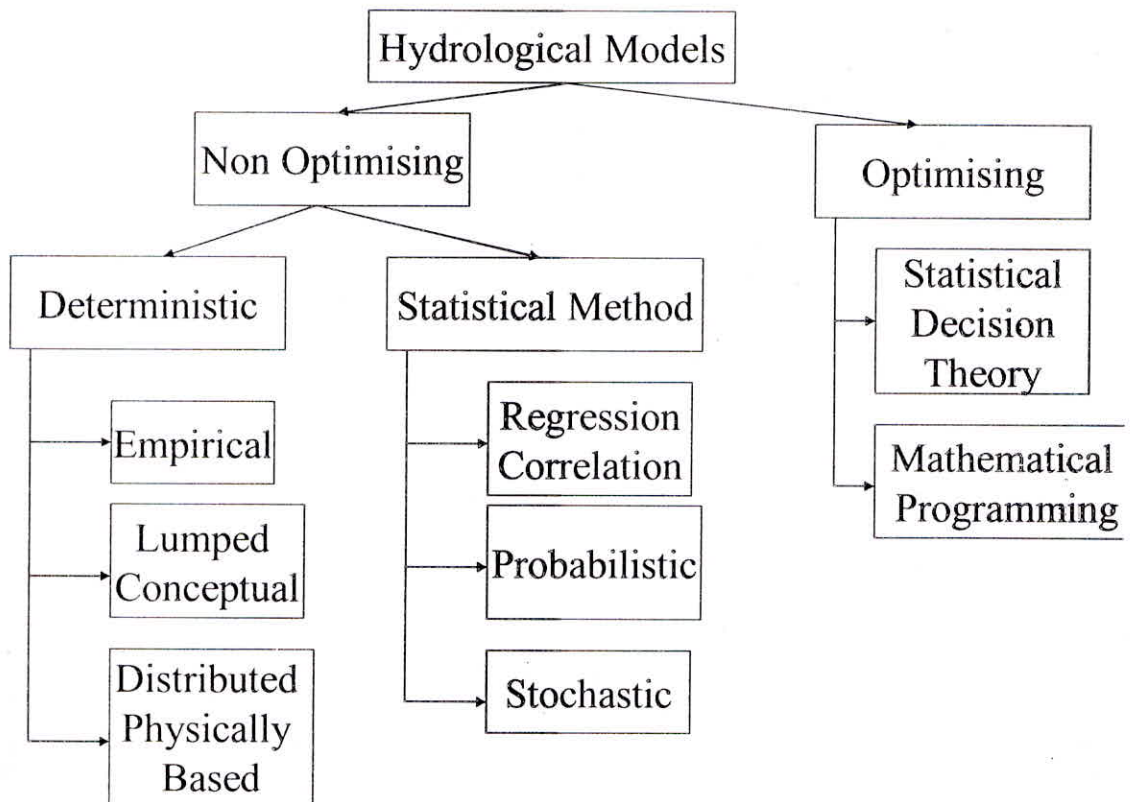


Figure 1: Classification of Hydrological Models

Deterministic Models

Deterministic models can be classified according to whether the model gives a spatially lumped or distributed description of the catchment area, and whether the description of the hydrological processes is empirical, conceptual or fully physically-based. In practice, most conceptual models are also lumped and most fully physically-based models are also distributed, so three main groups of deterministic models can be identified as shown in Fig.1.

Black box or empirical models

These contain no physically based transfer function to relate input to output : in other words no

consideration of the physical processes is involved. Such models usually depend upon establishing a relationship between input and output, calibrated from existing hydrometeorological records. Within the range of calibration data such models may be highly successful, often because the formal mathematical structure carries with it an implicit understanding of the underlying physical system. However, in extrapolating beyond the range of calibration, the physical link is lost and the prediction then relies on mathematical technique alone. Given the inherent linearity of many black-box models, which contrasts with the nonlinearity of hydrological systems, such extrapolation is of dubious worth and is not recommended (e.g. Anderson and Burt, 1985). Thus, for example, black box models cannot be used to predict the effects of a future change in land-use.

Probably the best known black box models in hydrology are the unit hydrograph model and the models applying the unit hydrograph principles, Sherman (1932), Lyshede (1955), Nash (1959).

Black box models were developed and extensively applied before advances in computer technology made it possible to use more physically correct (and thus more complex) models. Today, black box principles are more often used to form components of a larger model, e.g. the unit hydrograph is often used for streamflow routing in conceptual rainfall-runoff models.

Lumped conceptual models

These occupy an intermediate position between the fully physically-based approach and empirical black-box analysis. Such models are formulated on the basis of a relatively small number of components, each of which is a simplified representation of one process element in the system being modelled.

The SNSF model has been developed as a part of the Norwegian "Acid Precipitation : Effects on Forests and Fish" - project (Lundquist, 1978). In contrast to NAM and HBV, the SNSF model breaks the catchment down into four parallel subcatchments consisting of lakes, forests, bogs, and impervious areas respectively. The purpose of this breakdown is primarily to enable the runoff from ungauged catchments to be estimated using standard parameters together with data on the actual areal distribution between the four subcatchments and meteorological time series.

A detailed treatment of lumped models, including a description of the British Institute of Hydrology Lumped Model, is given by Blackie and Eeles (1985).

Fully distributed, physically-based models

These are based on our understanding of the physics of the hydrological processes which control catchment response and use physically-based equations to describe these processes. From their physical basis such models can simulate the complete runoff regime, providing multiple outputs (e.g. river discharge, phreatic surface level and evaporation loss) while black box models can offer only one output. Also, almost by definition, physically-based models are spatially distributed since the equations from which they are formed generally involve one or more space coordinates. They can therefore simulate the spatial variation in hydrological conditions within a catchment as well as simple outflows and bulk storage volumes. On the other hand, such models

make huge demands in terms of computational time and data requirements and are costly to develop and operate. The advantages and disadvantages of physically-based models are considered in more detail below.

Unlike lumped conceptual models, physically-based distributed models do not consider the transfer of water in a catchment to take place between a few defined storages.

- For example soil conductivity obtained from a single core may not be representative of the effective conductivity at a larger grid scale, where allowance is required for macropore effects and spatial variability within the grid square.
- Conceptual understanding of hydrological processes is not always sufficient or cannot always be expressed mathematically. For example, it may be necessary to assume soil conductivity to be constant spatially and temporally because there is insufficient information to allow for spatial variations or temporal changes associated with shrinkage or crusting. Macropore effects have similarly to be approximated for lack of a suitable theory.

The various aspects of event based stream flow simulation models including building an event based streamflow simulation model and some of the commonly used event based models have been discussed by Singh (1989) are reproduced in **Table 1**.

Table 1: Some Event Based Stream flow Simulation Models

Model			Model components						
Names	Author(s)	year	Base flow separation	Dr volume	Infiltration and loss	Dr hydrograph	Channel routing	Reservoir routing	Parameter optimization
HEC-1	Hydrologic Engineering Center	1981, 1982	Yes	SCS curve number and two other methods	Variable loss rate method	Clark's and Snyder's unit hydrograph methods	Muskingum method and five other methods	Storage indication method	Automation calibration capability
TR-20	Soil conservation service	1973	Constant rate method	SCS curve number method	SCS curve number method	Unit hydrograph method	Convex method	Storage indication method	No
USGS	Dawdy et al.	1972	Constant rate method	Soil moisture accounting	Philip equation	Clark's unit hydrograph	Translation method	No	Rosen Brock's method
HYMO	Williams and Hann	1973	No	SCS curve number method	SCS curve number method	Nash method	Variable storage coefficient method	Storage indication method	No
SWMM	Metcalf and eddy,inc et al.	1971	No		Horton's equation	Hydraulic method		No	No
WAHS	Singh	1983	Recursion equation	SCS curve number method	Philip's equation	Geomorphological Unit hydrograph method	Linear reservoir	No	RosenBrock-palmer method
RORB	Laurenson and mein	1983	Two options	No	Constant and variable loss methods	Non linear storage routing	Non linear storage routing	Yes	No
WBNM	Boyd et al.	1979a, 1979b	No	Yes	Φ-index	Linear as well as storage element for routing	Storage routing	No	Yes
FHSM	Foroud and Broughton Zhao et al.	1981	Yes	Yes	Modified Horton's equation	Time area curve+linear reservoir	No	No	Non linear least square curve fitting
XJM	Zhao et al.	1980	Yes	Yes	Storage capacity curve	Unit hydrograph method	Muskingum method	No	No
GAWSER	Ghate and Whiteley	1977 1982	Yes	Yes	Holtan's equation	Time area curve+convolution	Hymo method	No	No
MIT	Maddaus and Eagleson	1969	No	No	Any suitable method	Linear channel and reservoir	linear	No	optimization
HM	Huggins and Monke	1968	No	Yes	Holtans' equation	Kinematic wave method	No	No	No
KANSAS	Smith and Lumb	1966	Yes	Yes	Soil moisture accounting	Lag and route method	No	No	No
IHM	Morris	1980	Yes	Yes	Richards equation	St. Venant Equation	St. Venant Equation	No	No

MODEL CALIBRATION AND VALIDATION

Hydrological models are the mathematical models having some unknown coefficients known as parameters. Model calibration means the estimation of those parameters from historical input-output records. Model validation means judging the performance of the calibrated model over that portion of historical records which have not been used for the calibration.

For model calibration the methods, which have been commonly used, include

- (i) manual parameter assessment using 'Trial and Error' procedure,
- (ii) automatic parameter assessment using numerical optimisation procedure and
- (iii) a combination of (i) and (ii).

For the model validation, various validation criteria, developed based on the observed and computed output records, are used.

Hydrological Processes Considered in Stream Flow Simulation Models

Various stream flow simulation models generally consider the following hydrological processes to simulate the time series of stream flow.

(a) Land Surface Processes

- (i) Interception
- (ii) Infiltration
- (iii) Overland flow
- (iv) Evapotranspiration
- (v) Snow accumulation and Melt

(b) Sub-surface Processes

- (i) Interflow
- (ii) Soil moisture storage and Movement
- (iii) Ground water storage and flow

(c) Channel Processes

- (i) Channel flow
- (ii) Flood plain storage
- (iii) Lakes, Reservoirs and Diversions

Hydrological Modelling Procedures

The following procedures are usually followed for Hydrological Modelling:

- Develop a suitable model structure to simulate various component processes keeping in mind the quantity and quality of the data available and nature of the problems for which the modelling is required.
- Calibrate the developed model using the historical records.
- Validate the model using the historical records which have not been considered for calibration.
- Perform sensitivity analysis study to identify the most sensitive parameters of the model which require proper investigation before arriving at the final parameter values.
- Use the calibrated and validated model for solving the specific hydrological problem for which the development of the model is intended for.

Concept of Deterministic Mathematical Modelling and Sources of Uncertainty

The concept of deterministic simulation can be illustrated as in Fig.1, where the physical system, in this case a catchment, is shown on the left, and the mathematical model is shown on the right. The model is a simplified representation of the physical system.

Basically four sources of uncertainty occur in deterministic simulation, the disagreements between recorded and simulated output resulting from:

1. **Error Source 1:** Random or systematic errors in the input data, e.g. precipitation, temperature, or evapotranspiration used to represent the input conditions in time and space for the catchment.
2. **Error Source 2:** Random or systematic errors in the recorded output data, e.g. water level or discharge data used for comparison with the simulation output.
3. **Error Source 3:** Errors due to non-optimal parameter values.

4. **Error Source 4:** Errors due to incomplete or biased model structure.

Thus, during the calibration process only error source 3 is minimized, whereas the disagreement between simulated and recorded output is due to all four-error sources. The measurement errors and errors source 2 serve as a 'background noise' and give a minimum level of disagreement below which further parameter or model adjustments will not improve the results. The objective of a calibration process is then to reduce the error source 3 until it is insignificant compared with the data error sources 1 and 2.

During a calibration process it is of the utmost importance to ensure that a clear distinction is drawn between the different error sources, so that it is not attempted to compensate for errors for one source by adjustment within another source, e.g. compensate for a data error by parameter adjustments. Otherwise the calibration will degenerate to curve fitting, which may result in a reasonable fit within the calibration period but will inevitably give poor simulation results for other periods. In the following five examples it would be physically incorrect and fatal for future predictions to try to compensate for the following discrepancies between recorded and simulated flows using parameter adjustments:

- Both flood peak and runoff volume for a hydrograph are under predicted, owing to an underestimation of the average precipitation, Error source-1.
- Discrepancies are observed between simulated and recorded flow in a period where the recorded flow is known to be very uncertain owing to problems with the rating curve. Error source 2.
- A flood peak is under predicted as a result of embankments being breached whereas the model has been developed assuming non-breaching embankments. Error source 4.
- Travel time for high flows is smaller than the travel time for low flows but the routing model is linear with the travel time independent of flow regime. Error source 4.
- The base flow in low flow periods decreased during the calibration period owing to ground water abstraction and lowering of the ground water tables but ground water abstraction cannot be accounted for directly in the applied model. Error source 4.

GOODNESS OF FIT AND ACCURACY CRITERIA

During the calibration procedure an accuracy criterion can be used to compare the simulated and measured outputs. This enables an objective measure of the goodness of fit associated with each set of parameters to be obtained and the optimum parameter values to be identified. However, selection of an appropriate criterion is greatly complicated by the variation in the sources of error discussed in the last section. It further depends on the objective of the simulation (e.g. to simulate flood peaks or hydrograph shape) and on the model output variable, e.g. phreatic surface level, soil moisture content, stream discharge or stream water level. No single criterion is entirely suitable for all variables and even for a single variable it is not always easy to establish a satisfactory criterion. Hence a large

number of different criteria has been developed. The most widely used criterion is the sum of the squares of the deviations between recorded and simulated values of a variable:-

$$F^2 = \sum_{i=1}^n (QOBS_i - QSIM_i)^2$$

where

- F^2 = index of disagreement, or objective function
- $QOBS_i$ = recorded value at time step i
- $QSIM_i$ = Simulated value at time step i
- n = number of values (time steps) within the considered time period

All values of $QOBS_i$ and $QSIM_i$ are based on a time step which may be e.g. one hour, one day or one month. One disadvantage with this criterion is that F^2 is dimensional (e.g. (m/s)²). Therefore, the following nondimensional form is often used:

$$R^2 = \frac{\frac{1}{n} \sum_{i=1}^n (QOBS_i - \overline{QOBS})^2 - \frac{1}{n} \sum_{i=1}^n (QOBS_i - QSIM_i)^2}{\frac{1}{n} \sum_{i=1}^n (QOBS_i - \overline{QOBS})^2}$$

where

$$\overline{(QOBS)} = \frac{1}{n} \sum_{i=1}^n QOBS_i$$

R^2 is often denoted the coefficient of determination, the explained variance or the model efficiency. R^2 can vary from -0 to +1, where $R^2 = +1$ represents a complete agreement between recorded and simulated values. It is noted that the simple one parameter model $QSIM_i = QOBS$ will give $R^2=0$. Although the R^2 criterion is a dimensionless measure it depends heavily on the variance in the recorded series. Thus comparison of R^2 values for different catchments or even for different periods in the same catchment makes no sense.

Among the other numerical criteria often used are the following:

$$F = \sum_{i=1}^n |(QOBS_i - QSIM_i)|$$

which is a measure of the accumulated deviation (absolute) between recorded and simulated values:

$$R = \frac{\sum_{i=1}^n (QOBS_i - \overline{QOBS})(QSIM_i - \overline{QSIM})}{\sum_{i=1}^n (QOBS_i - \overline{QOBS})^2 \sum_{i=1}^n (QSIM_i - \overline{QSIM})^2}$$

$$F^{2\log} = \sum_{i=1}^n (\log QOBS_i - \log QSIM_i)^2$$

which does not focus as much peak matching as done the F^2 criterion; and

which is the linear correlation coefficient between the simulated and the recorded series:

It is perfectly feasible to calibrate a model by optimizing just one of the available criteria. However, a calibration based on 'blind' optimization of a single numerical criterion risks producing physically unrealistic parameter values which, if applied to a different time period, will give poor simulation results. In the same vein it should be remembered that the criteria measure only the correctness of the estimates of the hydrological variables: generated by the model and not the hydrological soundness of the model relative to the processes being simulated. It is therefore recommended that, in a calibration, numerical criteria be used for guidance only.

In general it is recommended that a combination of the following four conditions be considered in determining goodness of fit:

- (i) A good agreement between the average simulated and recorded flows, i.e. and good water balance.
- (ii) A good agreement for the peak flows, with respect to a volume, rate and timing.
- (iii) A good agreement for low peaks.
- (iv) A good overall agreement for hydrograph shape with emphasis on a physical correct model simulation.

These four conditions can be optimized numerically or subjectively through interactive computer graphics. In cases where all four criteria cannot be optimized simultaneously the priority depends on the objective of the project in question.

Finally, although the use of numerical criteria has been emphasized above, the value of graphical comparison of simulated and observed hydrograph should not be overlooked. Although analyzed more subjectively, a graphical plot provides a good overall impression of the model capabilities, is easily assimilated and may impact more practical information than does a statistical function. Graphical comparison should always be included in any examination of the goodness of fit of a simulated hydrograph.

MODEL CALIBRATION

Model calibration in general involves manipulation of a specific model to reproduce the response of the catchment under study within some range of accuracy. In a calibration procedure an estimation is made of the parameters, which cannot be assessed directly from field data. All empirical (black box) models and all lumped, conceptual models contain parameters whose values have to be estimated through calibration. The fully distributed physically-based models contain only parameters which can be assessed from field data, so that in theory a calibration should not be necessary if sufficient data are available. However, for all practical purposes the distributed, physically-based models also require some kind of calibration, although the allowed parameter variations are restricted to relatively narrow intervals compared with those for the empirical parameters in empirical or lumped, conceptual models.

CALIBRATION METHODS

In principle three different calibration method can be applied:

- a. 'Trial and Error', manual parameter assessment
- b. Automatic, numerical parameter optimization
- c. A combination of (a) and (b)

The trial and error method implies a manual parameter assessment through a number of simulation runs. This method is by far the most widely used and is the most recommended methods, especially for the more complicated models. A good graphical representation of the simulation results is a prerequisite for the trial and error method. An experienced hydrologist can usually achieve a calibration using visual hydrograph inspection within 5-15 simulation runs.

Automatic parameter optimization involves a numerical algorithm which optimizes or minimizes a given numerical criterion. The objective of automatic parameter optimization is to search through the many combinations and permutation of parameter levels to achieve the set which is the optimum or 'best' in terms of satisfying the criterion of accuracy. Several optimization techniques have been used for calibration of hydrological models. A decade ago the most popular was Rosenbrock's method (Rosenbrock, 1960).

The advantages of automatic parameter optimization over the trial and error method are:

- Automatic optimization is quick, because almost all work is carried out by computer.
- Automatic optimization is less subjective than the trial and error method, which to a large degree depends on visual hydrograph inspection and the personal judgment of the hydrologist.

Disadvantages of automatic parameter optimization include:-

- The criterion to be optimized has to be a single numerical criterion based on a single variable; as discussed in earlier section, though, selection of an appropriate criterion under these constraints is a complicated task.
- If the model contains more than a very few parameters the optimization will probably result in a local optimum instead of the global one.
- The theories behind the search algorithms assume that the model parameters are mutually independent. This assumption is usually not satisfied in practice.
- An automatic routine cannot distinguish between the different error sources mentioned earlier. Therefore, an automatic optimization algorithm will try to compensate, e.g. for data errors by parameter adjustments, with the results that the parameters values often become physically unrealistic and give poor simulation results when applied to a period different from the calibration period.

Combination of the trial and error and automatic parameter optimization method could involve, for example, initial adjustment of parameter values by trial and error to delineate rough orders of magnitude, followed by fine adjustment using automatic optimization within the delineated range of physically realistic values. The reverse procedure is also possible, first carrying out sensitivity tests by automatic optimization to identify the important parameters and then calibrating them by trial and error. The combined method can be very useful but does not yet appear to have been widely used in practice.

Finally, given the large number of parameters in a physically based distributed model like the SHE, it is not realistic to obtain an accurate calibration by gradually varying all the parameters single or in combination. A more sensible approach is to attempt a coarser simulation using only the few parameters to which the simulation from sensitivity analysis. However, experience suggests that the soil parameters will usually require the most attention because of their role in determining the amount of precipitation which infiltrates and hence the amount which forms overland flow.

The above methods of calibration consider single objective function. In case multi objective function is required to be considered,

then two types of approaches, viz. classical approach and Pareto approach may be utilised. In classical approach a combined objective function is desired assigning the weights to the various objective function depending upon the user requirement. In pareto approach a set of parameter values are determined using search algorithm in such a way that the global optima is achieved considering the multi objective function.

MODEL VALIDATION

If the model contains a large number of parameters it is nearly always possible to produce a combination of parameter values which permits a good agreement between measured and simulated output data for a sort calibration period. However, this does not guarantee an adequate model structure or optimal parameter values. The calibration may have been achieved purely by numerical curve fitting without considering whether the parameter values so obtained are physically reasonable. Further, it might be possible to achieve multiple calibrations or apparently equally satisfactory calibrations based on different combinations of parameter values. In order to find out whether a calibration is satisfactory, or which of several calibrations is the most correct, the calibration should therefore be tested (validated) against data different from those used for the calibration (e.g. Stephenson and Freeze, 1974). Klemes (1986) states that a simulation model should be tested to show how well it can perform the kind of task for which it is intended. Performance characteristics derived from the calibration data set are insufficient as evidence of satisfactory model operation. Thus the validation data must not be the same as those used for calibration but must represent a situation similar to that to which the model is to be applied operationally.

Klemes (1986) further noted that a central question is: what are the grounds for credibility of a given hydrological simulation model? Usually they concern the goodness of fit of the model output to the historical record in a calibration period, combined with an assumption that the conditions under which the model will be used will be similar to those of the calibration period. Clearly, though, this is insufficient for a physically-based distributed model which is designed specially to simulate conditions different from those likely to be available for calibration, e.g. when simulating the impact of a future land-use change. In that case a demonstration of model transposability is required. Initially transposability referred to geographical transposability within one hydrologically homogeneous region. However, its scope has since been broadened to include transposability from one land use type to another, from one region to another and, recently, from one climate to another.

SCHEMES FOR SYSTEMATIC VALIDATION OF SIMULATION MODELS

The heirarchical scheme proposed by Klemes (1986), should be referred to here. The scheme is briefly discussed below:

The scheme is called hierarchical because the modelling tasks are ordered according to their increasing complexity, and the demand of

the test increase in the same direction. Two major categories are proposed for the process to be simulated, in particular:

- a. Stationary conditions, and
- b. Non stationary conditions

Each of them being sub-divided into two hierarchical sub-groups according to whether the simulation is to be done for:

- a. the same station (basin) which was used for calibration or
- b. a different station (basin)

Here, the term stationary is used to denote physical conditions that do not appreciably change with time:

Typical examples of modelling tasks in these four classes of increasing difficulty are as follow:

- 1a. **Filling in a missing segment of, or extending a stream flow record**
- 1b. **Simulation of a stream flow record in an ungauged basin**
- 2a. **Simulation of streamflow record in a gauged basin for conditions after a change in land use, climate or both**
- 2b. **Simulation of a streamflow record in an ungauged basin for conditions after a change in land use, climate or both**

The following tests are recommended as a minimum standard for operational testing of models for the above four levels of difficulty of the simulation task:

- 1a. Split sample test
- 1b. Proxy basin test
- 2a. Differential split sample test
- 2b. Proxy basin differential split sample test.

- 1a) ***Split-sample test*** : The available record should be split into two segments one of which should be used for calibration and the other for validation. If the available record is sufficiently long so that one half of it may suffice for adequate calibration, it should be split into two equal parts, each of them should be used in turn for calibration and validation, and results from both arrangements compared. The model should be judged acceptable only if the two results are similar and the errors in both validations runs acceptable. If the available record is not long enough for a 50/50 splitting, it should be split in such a way that the calibration segment is long enough for a meaningful calibration, the remainder serving for validation. In such a case, the

splitting should be done in two different ways, e.g. (a) the first 70% of the record for calibration and the last 30% for validation; (b) the last 70% for calibration and the first 30% for validation. The model should qualify only if validation results from both cases are acceptable and similar. If the available record cannot be meaningfully split, then only a model which has passed a higher level test should be used.

- (1b) **Proxy-basin test** : This test should be required as a basic test for geographical transposability of a model, i.e. transposability within a region. If streamflow in an ungauged basin C is to be simulated, two gauged basins A and B within the region should be selected. The model should be calibrated on basin A and validated on basin B and vice versa. Only if the two validation results are acceptable and similar can the model command a basic level of credibility with regard to its ability to simulate the streamflow in basin C adequately.

This kind of test should also be required when an available streamflow record in basin C is to be extended and is not adequate for a split-sample test as described above. In other words, the inadequate record in basin C would not be used for model development and the extension would be treated as simulation in an ungauged basin (the record in C would be used only for additional validation, i.e. for comparison with a record simulated on the basis of calibrations in A and B).

Consider geographical transposability between regions I and II. If streamflow needs to be simulated in an as yet unspecified ungauged basin C (or on a number of such basins) in region II the procedure should be as follows. First, the model is calibrated on the historic record of a gauged basin D in region I. Streamflow measurements are started on at least two different substitute basins, A and B, in region II and maintained for at least three years. Then the model is validated on these three-year records of both A and B and judged adequate for simulation in a basin C if errors in both validation runs, A and B, are acceptable and not significantly different. After longer records in A and B become available, these two basins can be used for model development and subjected to the simpler test for transposability within a region as described above, using A and B as proxy basins for C. Of course, the substitute basins A and B, would not be chosen randomly but would be selected so as to be representative of the conditions in region II, and, as far as possible, with due consideration of future stream gauging needs.

- (2a) **Differential split-sample test** : This test should be required whenever a model is to be used to simulate flows in a given gauged basin under conditions different from those corresponding to the available flow record. The test may have several variants depending on the specific nature of the change for which the flow is to be simulated.

For a simulation of the effect of a change in climate, the test should have the following form. Two periods with different values of the climate parameters of interest should be identified in the historic record, e.g. one with high average precipitation, the other with low. If the model is intended to simulate streamflow for a wet climate scenario then it should be calibrated on a

dry segment of the historic record and validated on a wet segment. If it is intended to simulate flows for a dry climate scenario, the opposite should be done. In general, the model should demonstrate its ability to perform under the transition required: from drier to wetter conditions or the opposite.

If segments with significantly different climatic parameters cannot be identified in the given record, the model should be tested in a substitute basin in which the differential split-sample test can be done. This will always be the case when the effect of a change in land use, rather than in climate, is to be simulated. The requirement should be as follows: to find a gauged basin where a similar land-use change has taken place during the period covered by the historic record, to calibrate the model on a segment corresponding to the original land use and validate it on the segment corresponding to the changed land use.

Where the use of substitute basins is required for the testing, two substitute basins should be used, the model fitted to both and the results for the two validation runs compared. Only if the results are similar can the model be judged adequate. Note that in this case (two substitute basins) the differential split-sample test is done on each basin independently which is different from the proxy-basin test where a model is calibrated on one basin and validated on the other.

A differential split-sample test can arise by default from a simple split-sample test if the only meaningful way of splitting an available record is such that the two segments exhibit markedly different conditions.

- (2b) ***Proxy-basin differential split-sample test*** : This test should be applied in cases where the model is supposed to be both geographically and climatically (or land-use-wise) transposable. Such universal transposability is the ultimate goal of hydrological modelling, a goal which may not be attained in decades to come. However, models with this capability are in high demand and hydrologists are being encouraged to develop them despite the fact that thus far even the much easier problem of simple geographical transposability within a region has not been satisfactorily solved.

The test to demonstrate such a general transposability may have different forms depending on the specific modelling task involved. In the simplest case of geographical and climatic transposability within a region (e.g. for a model intended for assessment of impact of climatic change in an ungauged basin C), the test should have the following form. Two gauged basins, A and B, with characteristics similar to those of basin C are selected and segments with different climatic parameters, e.g. w for wet and d for dry, are identified in the historic records of both of them. Then, for an assessment of the impact of a dry climate scenario, the model is first calibrated on Aw and validated on Bd, and then calibrated on Bw and validated on Ad. It is judged adequate if errors in both validation runs Ad and Bd are acceptable and not significantly different. By analogy, a model intended for an assessment of the impact of a wet climate scenario would have to be calibrated/validated on Ad/Bw, and on Bd/Aw, and judged adequate if results from Bw and Aw are adequate and similar.

SENSITIVITY ANALYSES

Analysis of the sensitivity of the simulation results to changes in parameter values and analysis of parameter stability can serve as model tests. Such analyses can be carried out in different ways. The influence of the length of the calibration period on parameter uncertainty as well as parameter stability with time can also be evaluated from such analysis.

Extrapolation From Calibration Conditions

If the calibration is based on a narrow range of data, the model, even if physically-based, may not be applicable outside this range. For example, if the data based contains only small floods, the model, even if properly validated in the operational sense, cannot be trusted to simulate very large floods adequately. The calibration/validation exercise should therefore be based on as wide a range of conditions as possible. This approach can also be useful in eliminating incorrect calibrations in cases where it has been possible to achieve multiple calibrations based on different combinations of realistic parameter values. The incorrect calibrations are less likely to support acceptable simulations based on data outside the range used for calibration.

BIBLIOGRAPHY

1. Abbott, M.B., J.C. Bathurst, J.A. Cunge, P.E. O'Connell and J. Rasmussen, 1986. *An Introduction to the European Hydrological System - System Hydrologique European "SHE". History and Philosophy of Physically based distributed modelling system.* Jour. of Hydrology, 87: pp. 45-59.
2. Aitken, A.P., 1973. *Assessing Systematic Errors in Rainfall Runoff Model.* Journal of Hydrology, 20, 121-136.
3. Bathurst, J.C., 1986. *Physically-based distributed modelling of an upland catchment using the Systeme Hydrologique European.* J. Hydrol., 87(1/2), 79-102.
4. Bergston, S., 1976. *Development and application of a conceptual runoff model for Scandinavian Catchments.* Department of Water Resources Engineering, University of Lund. Bulletin Series A No. 52.
5. Betson, R.P., R.L. Tucker and F.M. Haller, 1969. *Using Analytical Method to Develop a Surface Runoff Model.* Water Resources Research, Vol. 5, No. 1, pp. 103-111.
6. Carrigan, P.H., Jr., 1973. *Calibration of U.S. Geological Survey Rainfall-Runoff Model for Peak Flow Synthesis - Natural Basins.* Report No. U.S.G.S.-W.R.D.-73-026, U.S. Geological Survey-WRD, Reston, Va, U.S.A.
7. Crawford, N.H. and Linsley, 1966. *Digital Simulation in Hydrology.* The Stanford Watershed Simulation Model 'IV'. Technical Report No. 39, Department of Civil Engineering, Stanford Univ., Stanford, California.
8. DHI, 1988. *Lecture notes and Exercises - Training course on Hydrological Computerized Modelling System (SHE).*

9. Fleming, G., 1975. *Computer Simulation Techniques in Hydrology*. Elsevier.
10. James, L.D., 1972. *Hydrologic Modelling, Parameter Estimation and Watershed Characteristics*. Journal of Hydrology, Vol. 17, pp. 283-307.
11. Klemes, V., 1986. *Operational Testing of Hydrological Simulation Models*. Hydrol. Sci. J., 31(1), 13-24.
12. NIH, 1982-83. *Modelling of Daily Runoff for Kasurnala Basin Using Betson and USGS Models*. Report No. CS-2, National Institute of Hydrology, Roorkee.
13. Rosenbrock, K.H., 1960. *An Automatic Method for finding the greatest or least value of a function*. The Computer Journal, Vol. 7(3).
14. Woolhiser, D.A., 1973. *Hydrologic and Watershed Modelling - State of the Art*. Transactions of the ASAE, 16, pp. 533-559.